

1. THE TRAYER CAT. 901A LIQUID LEVEL GAUGE IS REMOVABLE FROM THE COMBINATION OIL FILLING, OIL DRAIN, AND OIL SAMPLING PORT WHEN THE STAINLESS STEEL METER SEAL IS CUT. THIS IS A COMPLETELY STATIC DEVICE THAT ACTUALLY READS "LOW OIL" IF THE OIL DROPS BELOW PROPER LEVEL. IT IS AVAILABLE TO ALL SWITCH AND TRANSFORMER MANUFACTURERS IN ORDER TO PROMOTE INDUSTRY STANDARDIZATION.

2. DECAL READS

FILLED WITH NON-PCB MINERAL OIL (LESS THAN 1 PPM) AT TIME OF MANUFACTURE

3. WEIGHT 234LBS

4. NAMEPLATE READS



"BREAKER TRIPPED WHEN YELLOW INDICATOR PROJECTS INTO THE SIGHT GLASS, TO RESET BREAKER OPEN AND CLOSE THE OPERATING HANDLE

5. MATERIAL

11 GA. STAINLESS STEEL  
7 GA. STAINLESS STEEL

6. NOTE POSITION

UNIT MUST BE MOUNTED IN UPRIGHT POSITION

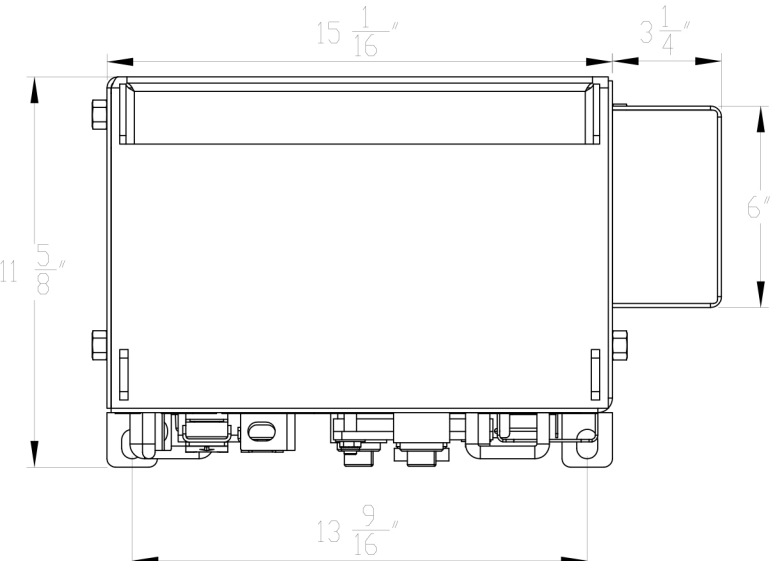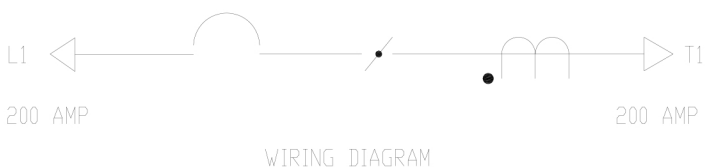

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRAYER ENGINEERING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TRAYER ENGINEERING CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: ± .0625 FRACTIONAL ± 1/16	DRAWN	RLS	09-16-09
	CHECKED	BAB	09-16-09
	ENG APPR.		
	MFG APPR.		
	REVISED	RLS	12-01-09
	COMMENTS:		
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

TRAYER ENGINEERING CORP. 898 PENNSYLVANIA AVE. SAN FRANCISCO, CA 94107		
CAT# 4111-0A VDM2 25 KV VAULT MOUNT LIQUID INSULATED VACUUM FAULT INTERRUPTER WITH VISIBLE DISCONNECT ASSEMBLY		
SIZE	DWG. NO.	REV
B	090916	C
SCALE: 1:6		SHEET 1 OF 1