


1. THE TRAYER CAT. 901C LIQUID LEVEL GAUGE IS REMOVABLE FROM THE COMBINATION OIL FILLING, OIL DRAIN, AND OIL SAMPLING PORT WHEN THE STAINLESS STEEL METER SEAL IS CUT. THIS IS A COMPLETELY STATIC DEVICE THAT ACTUALLY READS "LOW OIL" IF THE OIL DROPS BELOW PROPER LEVEL. IT IS AVAILABLE TO ALL SWITCH AND TRANSFORMER MANUFACTURERS IN ORDER TO PROMOTE INDUSTRY STANDARDIZATION.
2. DECAL READS  
FILLED WITH NON-PCB MINERAL OIL [LESS THAN 1 PPM] AT TIME OF MANUFACTURE
3. DECAL READS  
WARNING  
WHEN SWITCH SIDE MOUNTED (BUSHINGS NOT ON TOP) LIQUID LEVEL GAUGE MUST BE NEAR TOP FOR OIL TO COVER BUSHINGS
4. NAMEPLATE READS  
"BREAKER TRIPPED WHEN YELLOW INDICATOR PROJECTS INTO THE SIGHT GLASS, TO RESET BREAKER OPEN AND CLOSE THE OPERATING HANDLE"
5. MATERIAL  
TANK TOP, 7 GA. STAINLESS STEEL  
TANK BOTTOM, 11GA. STAINLESS STEEL.  
TANK SIDE, 14 GA. STAINLESS STEEL

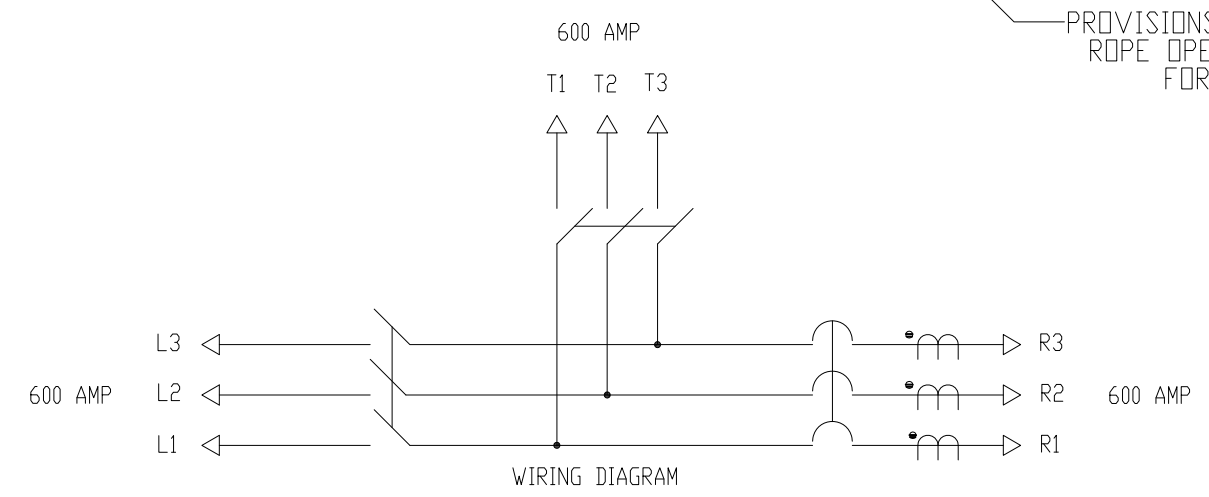

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRAYER ENGINEERING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TRAYER ENGINEERING CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: ±.0625 FRACTIONAL ± 1/16	DRAWN	RSCHAFFER	01-30-08
	CHECKED	BAB	01-30-08
	ENG APPR.	BAB	07-02-08
	MFG APPR.		
	REVISED	RLS	07-02-08
INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:		
MATERIAL	TYPE 304 S/S		
FINISH	NATURAL		
DO NOT SCALE DRAWING			

TRAYER ENGINEERING CORP. 898 PENNSYLVANIA AVE. SAN FRANCISCO, CA 94107		
CAT# 4101-2C		
TRAYER 15 KV SUBMERSIBLE LIQUID INSULATED VACUUM SWITCHGEAR ASSEMBLY		
SIZE	DWG. NO.	REV
B	060824	F
		SHEET 1 OF 1